

PATHWAY DOME

XBLD-DTLB



IK10



IP66




COLOUR
TEMP. 3000K



GROUND
MOUNT


PHOTOMETRIC DIAGRAM

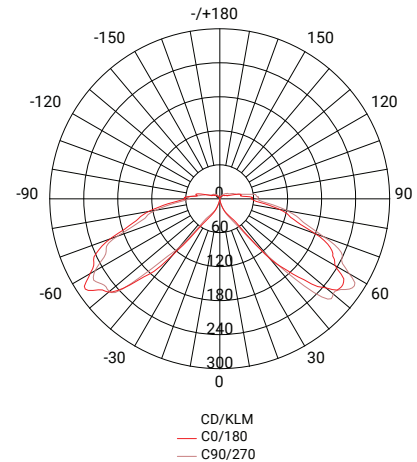

PHOTOMETRIC DATA

Efficacy (lm/W)	≥50
CCT	3000K
CRI	≥80
Beam Angle (°)	180°
LED Type	Lumileds 3030

DIAGRAM(S)/ADDITIONAL

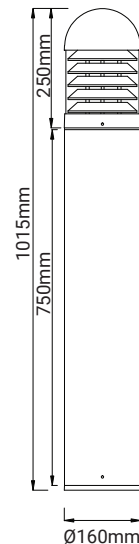

DESCRIPTION

The Pathway Dome is a low height dome bollard, pleasantly aesthetic amenity light & commonly suitable for all types of car parks, amenity general lighting & large commercial spaces.



KEY INFORMATION

Model	XBLD-FTLB
Power (W)	25W
Lumens (lm)	1250±lm
Construction	Extruded aluminium body Aluminium reflector
Dimming Options	Non-dimmable
Fitting Colour	Black
IP Rating (IP)	IP66 IK10
Lifespan (hrs)	50,000hrs
Dimensions (mm)	Ø160mm x H1015mm
Mounting	Ground mounted
Control Gear	Integral NON dimmable LED Meanwell HLG series driver

Additional:

- Comes with mini rag bolt assembly kit
- High efficiency heat sink
- 3 Year replacement warranty on fitting