

HURRICANE 2

XFLH200



120°



IP65



COLOUR
TEMP. 4000K




SMD LED



SURFACE
MOUNT



PHOTOMETRIC DIAGRAM

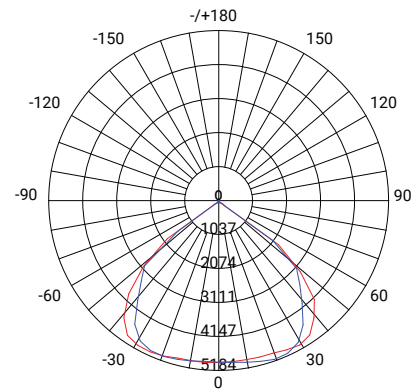

PHOTOMETRIC DATA

Efficacy (lm/W)	≥70
CCT	4000K
CRI	≥80
Beam Angle (°)	120°
LED Type	SMD2835

DIAGRAM(S)

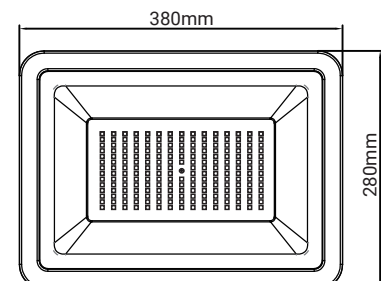

DESCRIPTION

The XLED HURRICANE series of floodlights are robust high-performance LED floodlights, which are ideal for commercial buildings, security lighting, sign illumination and public areas applications as well as residential applications.

Available in many wattages & sizes, the Hurricane series is sure to meet almost any installation requirements.

Big brother to Eclipse series



KEY INFORMATION

Model	XFLE200
Power (W)	200W
Lumens (lm)	~14,000lm
Construction	Die cast aluminium body Aluminium reflector Tempered glass diffuser
Dimming Options	Non-dimmable
Fitting Colour	Black
IP Rating (IP)	IP65
Lifespan (hrs)	40,000hrs
Dimensions (mm)	L380mm x W280mm x H45.8mm
Mounting	Surface mounted
Control Gear	Integral Electronic inbuilt constant current LED driver

Additional:

3 Year replacement warranty on fitting

Specification subject to change without prior notice.