



TROFFER T8

XTB236EL

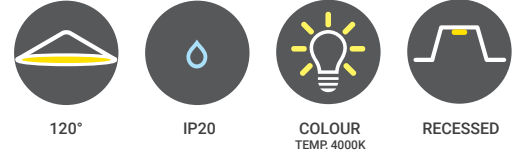


PHOTOMETRIC DIAGRAM

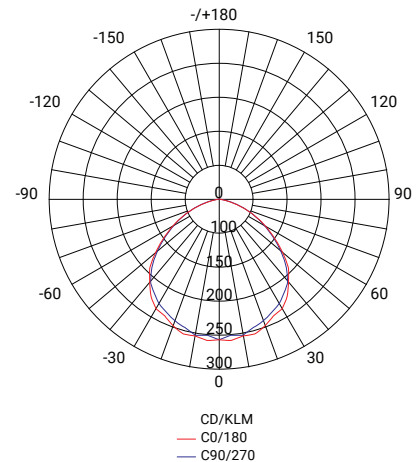

PHOTOMETRIC DATA

Efficacy (lm/W)	≥100
CCT	4000K
CRI	>80
Beam Angle (°)	120°
LED Type	T8 Fluorescent Tube

DIAGRAM(S)

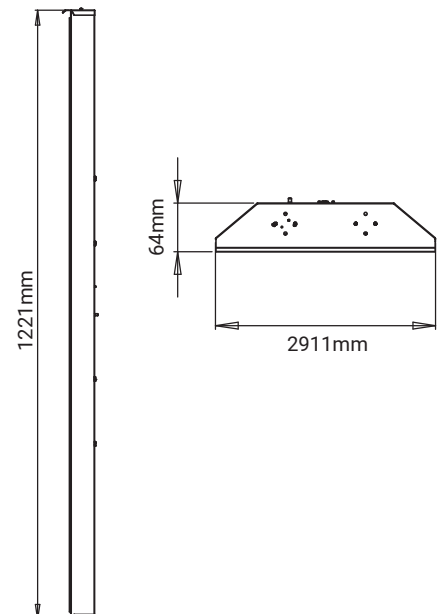

DESCRIPTION

Troffer Diffuser K12 Fluorescent T8 available in 18W and 36W twin options.

Suitable for installations in most commercial applications using a standard T-Bar suspended ceiling design. It can also be installed in a solid set ceiling using the optional plaster frame.

The prismatic diffuser is designed to optimize light output and reduce glare. T8 fluorescent lights are some of the most widely used and require minimal maintenance. Supplied complete with lamps.



KEY INFORMATION

Model	XTB236EL
Power (W)	2x36W
Lumens (lm)	~4690lm
Construction	Glossy white powder coated cold roll steel body
	Pattern 12 prismatic acrylic diffuser
Dimming Options	Non-dimmable
Fitting Colour	White
IP Rating (IP)	IP20
Lifespan (hrs)	30,000hrs
Dimensions (mm)	L1221mm x W291mm x H64mm
Mounting	Surface mounted

Additional:
3 Year replacement warranty on fitting